

## C30 MicroTurbine Natural Gas



Robust power system achieves ultra-low emissions and reliable electricity from natural gas.

- Ultra-low emissions
- One moving part: Minimal maintenance and downtime
- Patented air bearing: No lubricating oil or coolant
- 5 and 9 year Factory Protection Plans available
- Remote monitoring and diagnostic capabilities
- Integrated utility synchronization and protection<sup>(1)</sup>
- Small, modular design allows for easy, low-cost installation
- Reliable: Tens of millions of run hours and counting



C30 MicroTurbine

### Electrical Performance<sup>(2)</sup>

	High Pressure	Onboard Gas Compressor Option
Electrical Power Output	30 kW	28 kW
Voltage	400 to 480 VAC	400 to 480 VAC
Electrical Service	3-Phase, 4 wire	3-Phase, 4 wire
Frequency	50/60 Hz, grid connect operation 10-60 Hz, stand alone operation	50/60 Hz, grid connect operation 10-60 Hz, stand alone operation
Maximum Output Current	46A, grid connect operation 54A, stand alone operation <sup>(3)</sup>	46A, grid connect operation 54A, stand alone operation <sup>(3)</sup>
Electrical Efficiency LHV	26%	25%

### Fuel/Engine Characteristics<sup>(2)</sup>

	High Pressure	Onboard Gas Compressor Option
Natural Gas HHV	30.7 MJ/m <sup>3</sup> to 47.5 MJ/m <sup>3</sup> (825 to 1,275 BTU/scf)	30.7 MJ/m <sup>3</sup> to 47.5 MJ/m <sup>3</sup> (825 to 1,275 BTU/scf)
Inlet Pressure	379 to 414 kPa gauge (55 - 60 psig)	1.4 to 103 kPa gauge (0.2 to 15 psig)
Fuel Flow HHV	457 MJ/hr (433,000 BTU/hr)	444 MJ/hr (420,000 BTU/hr)
Net Heat Rate LHV	13.8 MJ/kWh (13,100 BTU/kWh)	14.4 MJ/kWh (13,700 BTU/kWh)

### Exhaust Characteristics<sup>(2)</sup>

	High Pressure	Onboard Gas Compressor Option
NOx Emissions @ 15% O <sub>2</sub> <sup>(4)</sup>	9 ppmvd (18 mg/m <sup>3</sup> )	9 ppmvd (18 mg/m <sup>3</sup> )
NOx/Electrical Output <sup>(4)</sup>	0.22 g/bhp-hr (0.64 lb/MWhe)	0.22 g/bhp-hr (0.64 lb/MWhe)
Exhaust Gas Flow	0.31 kg/s (0.69 lbm/s)	0.31 kg/s (0.69 lbm/s)
Exhaust Gas Temperature	275°C (530°F)	275°C (530°F)

*Reliable power when and where you need it. Clean and simple.*

## Dimensions & Weight<sup>(5)</sup>

Width x Depth x Height	0.76 x 1.5 x 1.9 m (30 x 60 x 77 in)
Weight – Grid Connect Model	405 kg (891 lb)
Weight – Dual Mode Model	578 kg (1,271 lb)

## Minimum Clearance Requirements<sup>(6)</sup>



Vertical Clearance	0.61 m (24 in)
Horizontal Clearance	
Left & Right	0.76 m (30 in)
Front	0.93 m (37 in)
Rear	0.92 m (36 in)

## Sound Levels

Acoustic Emissions at Full Load Power	
Nominal at 10 m (33 ft)	65 dBA

## Certifications

- Certified to UL 2200 for stand alone natural gas operation (UL files AU2687, E209370)
- Materials Equipment Acceptance (MEA) approval for New York City
- Models available with optional equipment for CE Marking

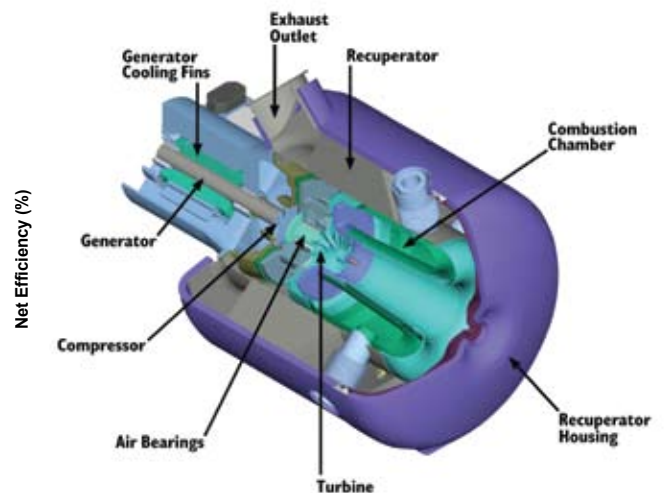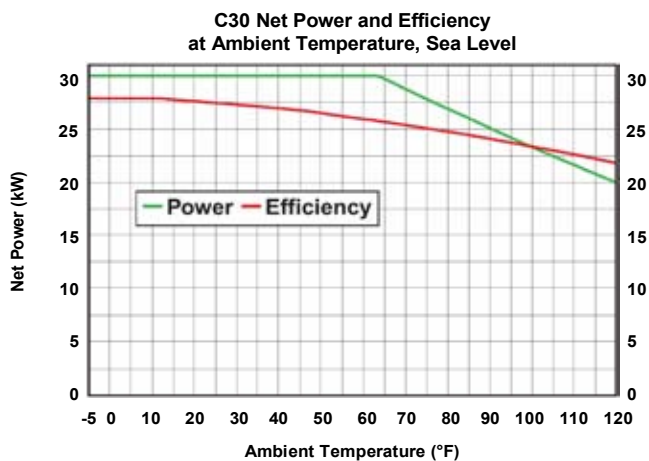

(1) Some utilities may require additional equipment for grid interconnectivity  
(2) Nominal full power performance at ISO conditions: 59°F, 14.696 psia, 60% RH  
(3) With linear load  
(4) Exhaust emissions for standard Natural Gas at 39.4 MJ/Nm<sup>3</sup> (1,000 BTU/scf) (HHV)  
(5) Approximate dimensions and weights  
(6) Clearance requirements may increase due to local code considerations  
*Specifications are not warranted and are subject to change without notice.*

